
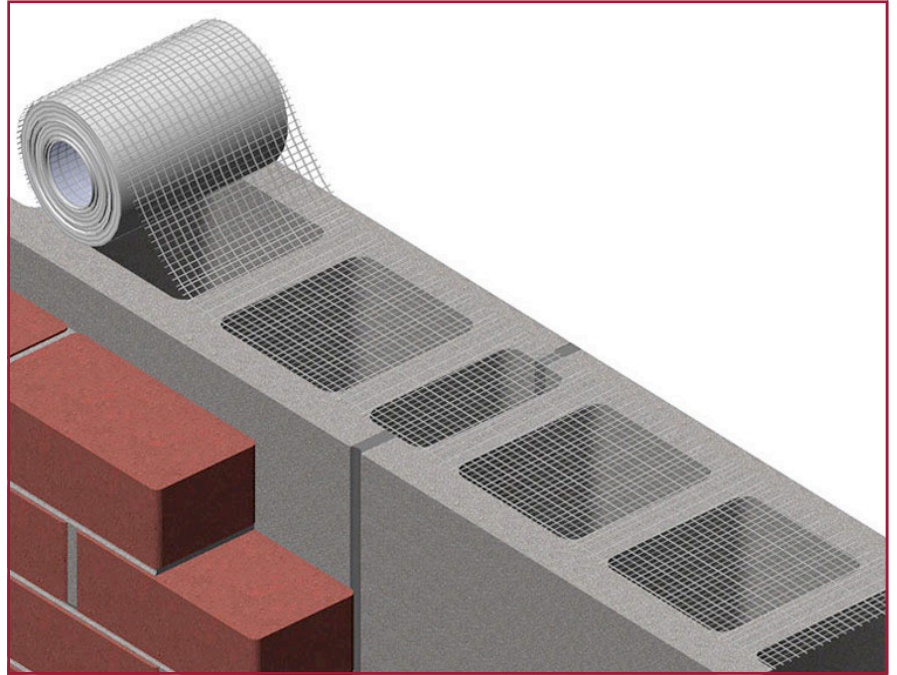


PRODUCT SUBMITTAL

WIRE-BOND

#3612 Grout Stop

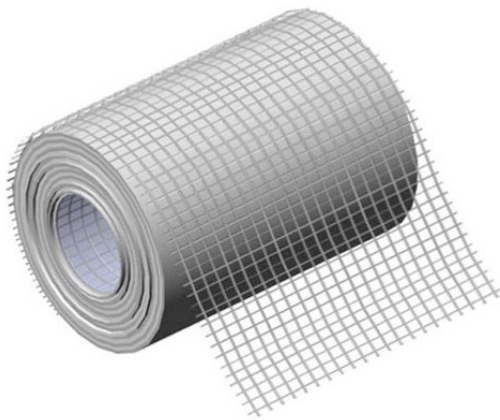

DESCRIPTION

Grout Stop:

- Designed to prevent grout from falling through block core while maintaining positive bond in mortar joint.
- Constructed of strong, non-corrosive 1/4" square polypropylene monofilament screening.
- Provides improved bonding of masonry anchor in hollow block construction.



SIZES

Sizes:

100 feet per roll

Width:

2" 4" 6" 8" 10"

Corporate Office: 400 Roundtree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113